


## VIBRATION REDUCTION - DEXTERITY



## TECHNICAL PROPERTIES

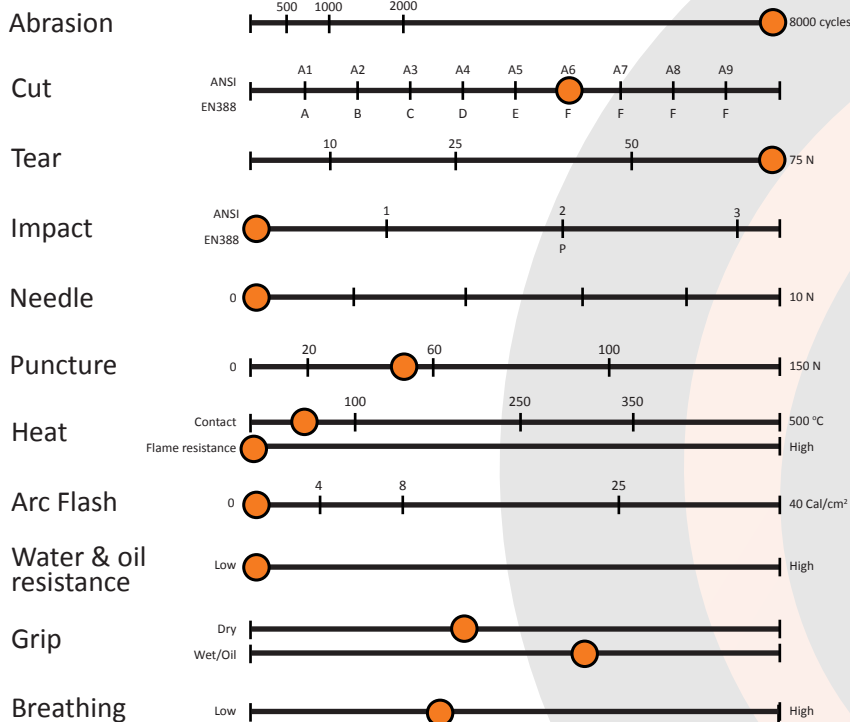

**EN388**



**4X41D**

- A: ABRASION (1-4)
- B: CUT (1-5)
- C: TEAR (1-4)
- D: PUNCTURE (1-4)
- F: ISO CUT (A-F)
- P: IMPACT PROTECTION

ISO Cut force (A-F)


- A | > 2 N
- B | ≥ 5 N
- C | ≥ 10 N
- D | ≥ 15 N
- E | > 22 N
- F | > 30 N



**EN10819 VIBRATION VALUES:**

TRM = 0,76

TRH = 0,67

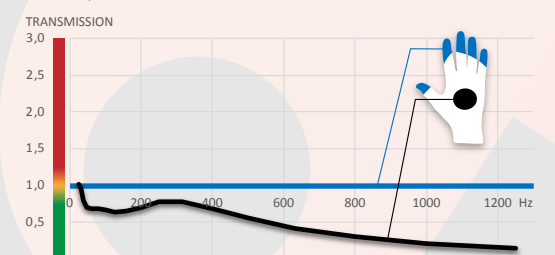

ART.NO: 15-4FLEXIVIB  
24 pairs (2 dozen)/Carton

