



REPLACEMENT HARNESS


FITTING INSTRUCTIONS



FITTING THE WHEEL RATCHET HARNESS CONTINUED



STEP 5: Take the final strap of the harness and place across the middle of the helmet.

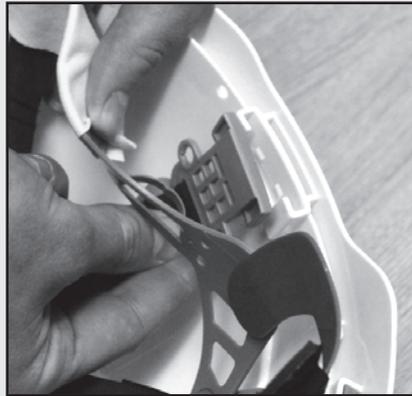

STEP 6: Tuck the first clip under the headband and align in the slot in the helmets shell. Push downwards until you hear the clip click into place.



STEP 7: Repeat on the other side making sure to tuck the clip under the headband and clip firmly into the slot in the helmets shell.

EVOLITE® COMPLETE WITH NEW HARNESS




Warning: Failure To Replace The Harness Correctly Will Compromise The Performance Of The Helmet

NOTE: HELMET SHOWN IS AN EVOLITE® BUT PROCESS IS EXACTLY THE SAME IN AN EVO3®



OXFORD, ENGLAND

EVO3® & EVOLITE® SLIP TO WHEEL RATCHET REPLACEMENT HARNESS FITTING INSTRUCTIONS

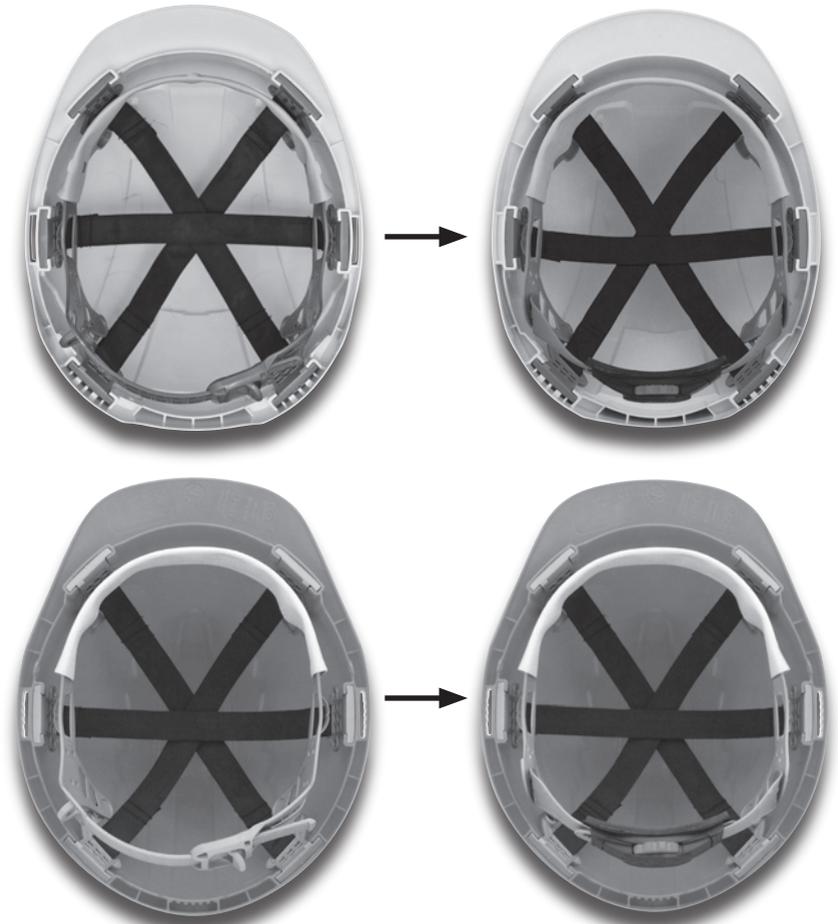

JSP Ltd, Worsham Mill, Minster Lovell Oxfordshire, OX29 0TA
TECHNICAL HELPLINE: +44(0)1993 826051
Email: technical.service@jsp.co.uk



REPLACEMENT HARNESS


FITTING INSTRUCTIONS




REMOVING THE SLIP RATCHET HARNESS




STEP 1: Locate the six clips on the inside of the helmet.

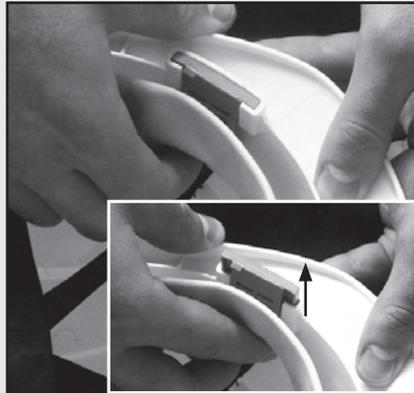

STEP 2: Grasp the bottom of the clip and push upwards to remove the clip from the slot in the helmets shell.

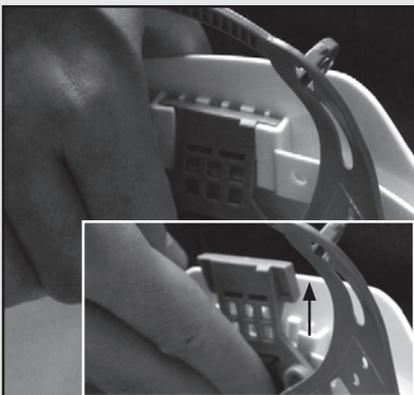

STEP 3: Repeat for all six clips until the harness is free from the helmets shell.

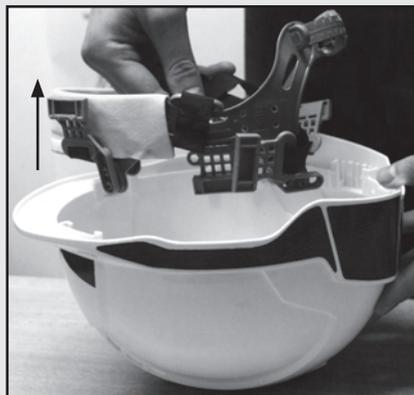

STEP 4: Remove the slip ratchet harness from the helmets shell.

NOTE: HELMET SHOWN IS AN EVOLITE® BUT PROCESS IS EXACTLY THE SAME IN AN EVO3®



JSP Ltd, Worsham Mill, Minster Lovell Oxfordshire, OX29 0TA
TECHNICAL HELPLINE:+44(0)1993 826051
Email: technical.service@jsp.co.uk

RFAZ-008-700




REPLACEMENT HARNESS


FITTING INSTRUCTIONS




FITTING THE WHEEL RATCHET HARNESS

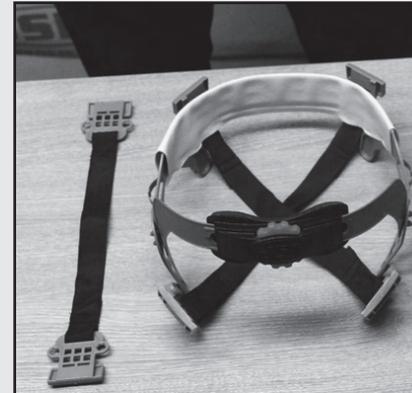

STEP 1: Before fitting the wheel ratchet harness make sure you have all the components of the new harness pictured above and the helmets shell from before.

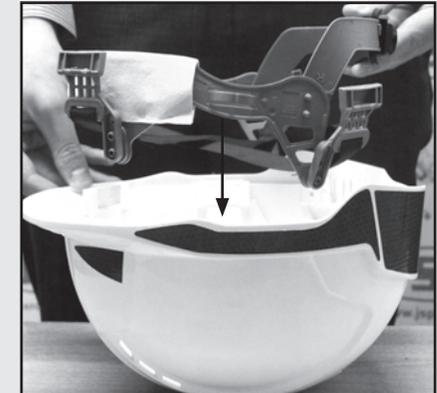

STEP 2: Place the wheel ratchet and head piece into the helmets shell making sure the sweatband is at the peak and the wheel ratchet is at the rear.

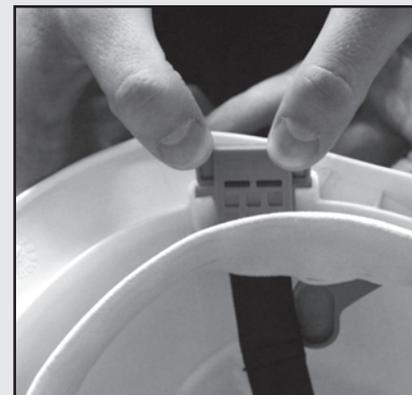

STEP 3: Align the clips with the slots in the helmets shell and push downwards until you hear the clip click into place.



STEP 4: Repeat for all four clips making sure they are firmly pressed in place.

CONTINUES ON REAR →



JSP Ltd, Worsham Mill, Minster Lovell Oxfordshire, OX29 0TA
TECHNICAL HELPLINE:+44(0)1993 826051
Email: technical.service@jsp.co.uk

RFAZ-008-700