


Data sheet

**SKYSAFE PRO FLEX Y**

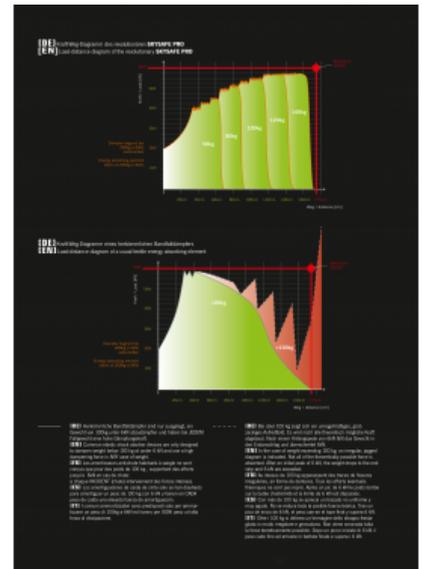

**GENERAL**

Art. no.:	L-0558-1,8
EAN:	4030281180647
Standard:	EN 354:2010 EN 355:2002

E-class number:	40-02-01-04
Customs no.:	56090000

## Data sheet

# SKYSAFE PRO FLEX Y

### ONE4ALL - The SKYSAFE PRO

Revolutionary, new, patented energy absorber with the large weight range from 50 - 140kg (110 - 310 lbs.) that always withstands a maximum impact of less than 6 kN at a maximum absorber length of 1.75m (5.7 Feet).

The final impact resistance of 22 kN, also in the absorber, before AND after a fall is exceptional as well. SKYSAFE PRO furthermore meets the most relevant international standards in one SINGLE product.

**UNIQUE:** The built-in, adjustable RESCUE LOOPS! As a result, rescuers need not set up a rescue system and hereby save precious time in a rescue!

Available in four versions with different carabiner combinations:  
I-web, Y-web, I-web tie-back, Y-web tie-back.

### GENERAL

Internat. standard:  
ANSI Z359.13-6/12ftFF:2013, AS/NZS  
1891.1:2007, CSA Z259.11-05-E6:2010

---

### FEATURES

Fall indicator

---

Breaking load, major axis:  
22 kN

---

Hand-washing: 40 °C

---

Suitable for edges: yes

---

Max. service life: 4-6

---

Max. number of persons: 1

---

Patent

---

Rescue Loop: yes

---

Temperature:  
from -35 °C to +45 °C

---

Suspension element: Webbing

---

Area of application:

Wind Energy / Offshore Industry

---

## DIMENSIONS

Size: 1,8m

Weight: 2.309

---

## HARDWARE

Carabiner on anchoring point side:

FS 64 ALU

Carabiner on belt side: KOBRA AL TRI

---

## MATERIAL

Material: Aluminium, Polyester

Webbing material: PES

---