




## TECHNICAL PROPERTIES



**EN388**

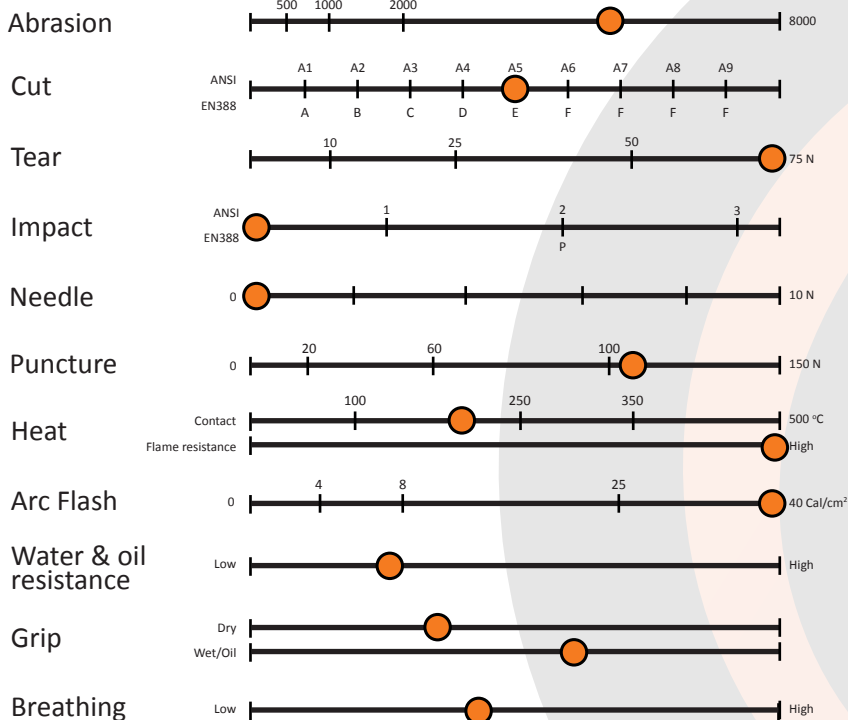

A: ABRASION (1-4)  
B: CUT (1-5)  
C: TEAR (1-4)  
D: PUNCTURE (1-4)  
F: ISO CUT (A-F)  
P: IMPACT PROTECTION

**4X42E**

**EN407**



A: FLAMMABILITY (1-4)  
B: CONTACT HEAT (1-4)  
C: CONVECTIVE HEAT (1-4)  
D: RADIAL HEAT (1-4)  
E: SMALL SPLASHES OF MOLTEN METAL (1-4)  
F: LARGE QUANTITIES OF MOLTEN METAL (1-4)

**4131XX**

**ARC FLASH**

**ASTM F2675, ATPV=**

59 Cal/cm<sup>2</sup> (back of hand)

42 Cal/cm<sup>2</sup> (palm)

**EN 61482 Modified by Aitex (Box Test)=**

Class 2

**NFPA 70E=**

Level 4

ISO (A-F)  
A | > 2 N  
B | ≥ 5 N  
C | ≥ 10 N  
D | ≥ 15 N  
E | > 22 N  
F | > 30 N




CE 1493  
CAT III

ART.NO: 13-4HAF-50  
12 pairs (1 dozen)/Carton

8	9	10	11	12
S	M	L	XL	XXL



## TEKNISKA EGENSKAPER

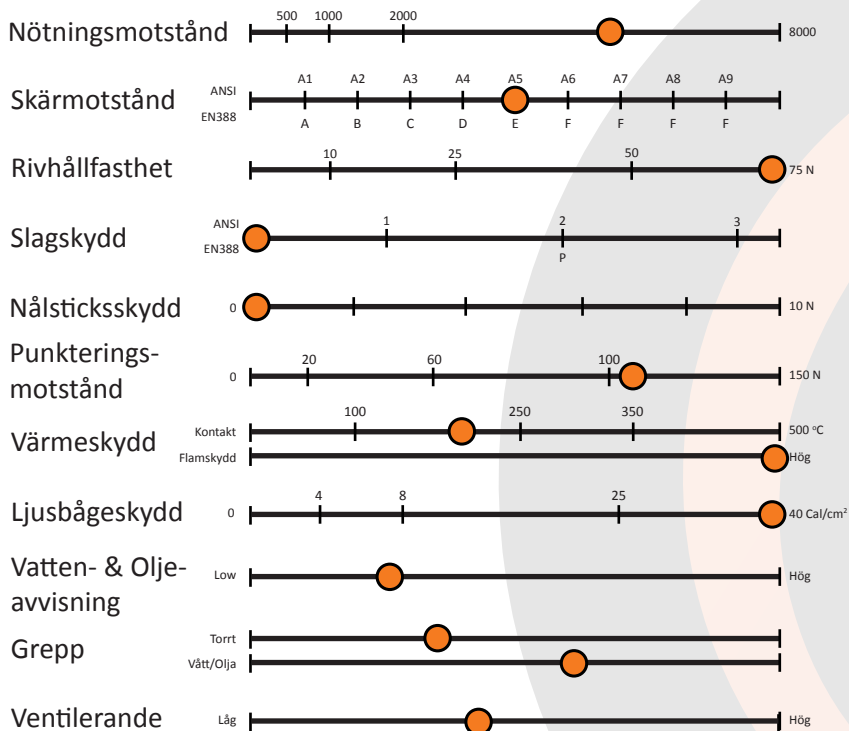

### EN388



### 4X42E

### EN407



### 4131XX

### ARC FLASH

ASTM F2675, ATPV=  
59 Cal/cm<sup>2</sup> (bakhand)  
42 Cal/cm<sup>2</sup> (handflata)

EN 61482 Modified by Aitex (Box Test)=  
Class 2

NFPA 70E=  
Level 4

ISO (A-F)  
A | > 2 N  
B | ≥ 5 N  
C | ≥ 10 N  
D | ≥ 15 N  
E | ≥ 22 N  
F | > 30 N




CE 1493  
CAT III

Art.nr: 13-4HAF-50  
12 par (1 dussin)/Kartong

8	9	10	11	12
S	M	L	XL	XXL



## TECHNISCHE EIGENSCHAFTEN

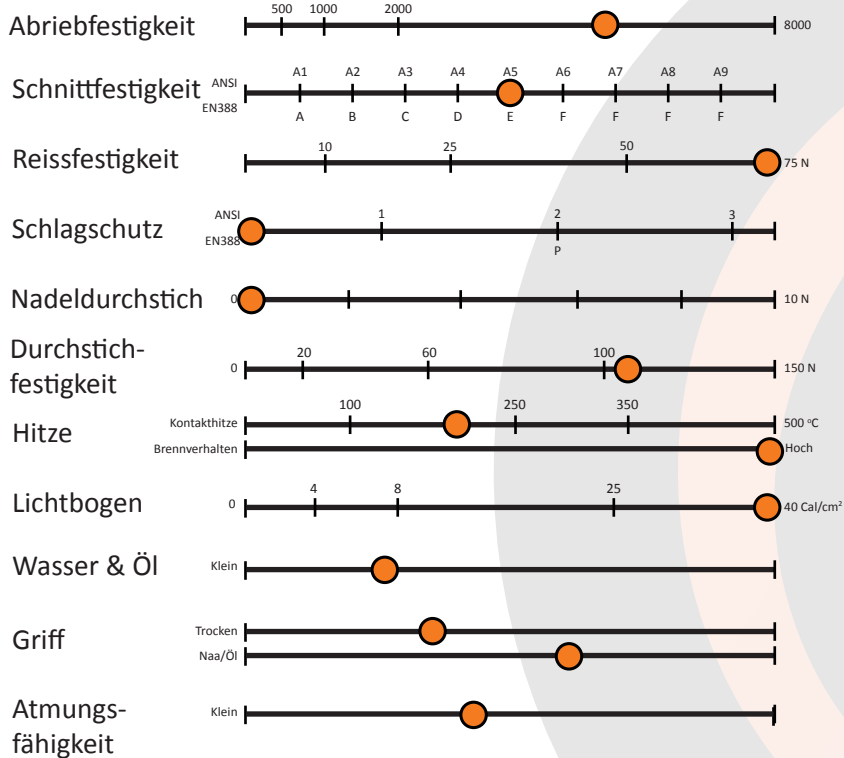

**EN388**



**4X42E**

**EN407**



**4131XX**

**ARC FLASH**

**ASTM F2675, ATPV=**

59 Cal/cm<sup>2</sup> (handrücken)

42 Cal/cm<sup>2</sup> (handfläche)

**EN 61482 Modified by Aitex (Box Test)=**

Class 2

**NFPA 70E=**

Level 4

ISO (A-F)  
A | > 2 N  
B | ≥ 5 N  
C | ≥ 10 N  
D | ≥ 15 N  
E | > 22 N  
F | > 30 N




Art.nr: 13-4HAF-50  
12 paar (1 dutzend)/Karton

**CE** 1493  
CAT III

8	9	10	11	12
S	M	L	XL	XXL



## PROPRIETÀ TECNICHE

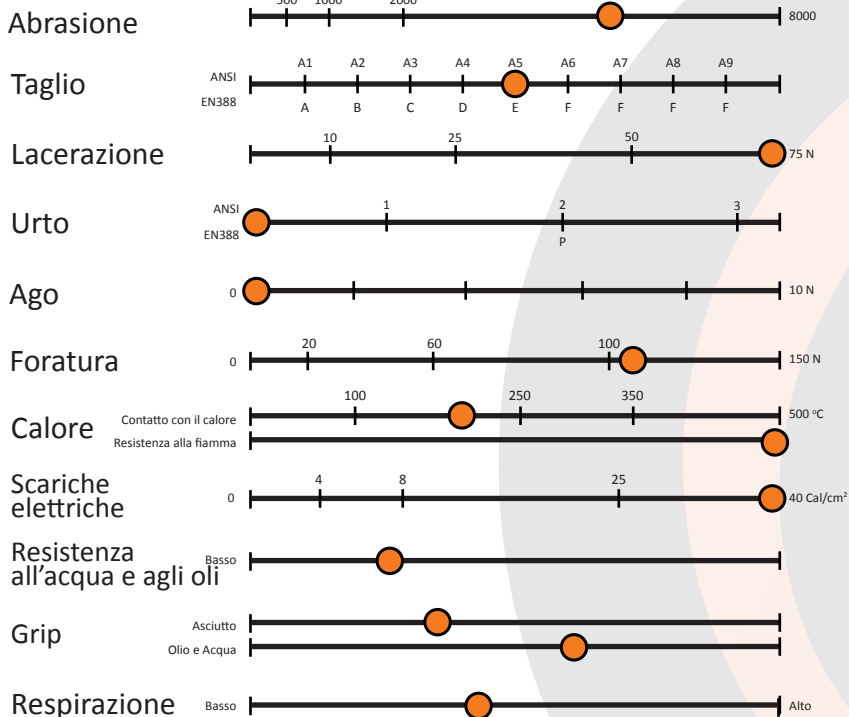

**EN388**



**4X42E**

**EN407**



**4131XX**

**ARC FLASH**

**ASTM F2675, ATPV=**

59 Cal/cm<sup>2</sup> (dorso della)

42 Cal/cm<sup>2</sup> (palma)

**EN 61482 Modified by Aitex (Box Test)=**

Class 2

**NFPA 70E=**

Level 4

ISO (A-F)

A | > 2 N

B | ≥ 5 N

C | ≥ 10 N

D | ≥ 15 N

E | > 22 N

F | > 30 N




**CE** 1493  
**CAT III**

ART.NO: 13-4HAF-50  
12 paia (1 dozen)/Cartone

8	9	10	11	12
S	M	L	XL	XXL



## PROPIEDADES TÉCNICAS

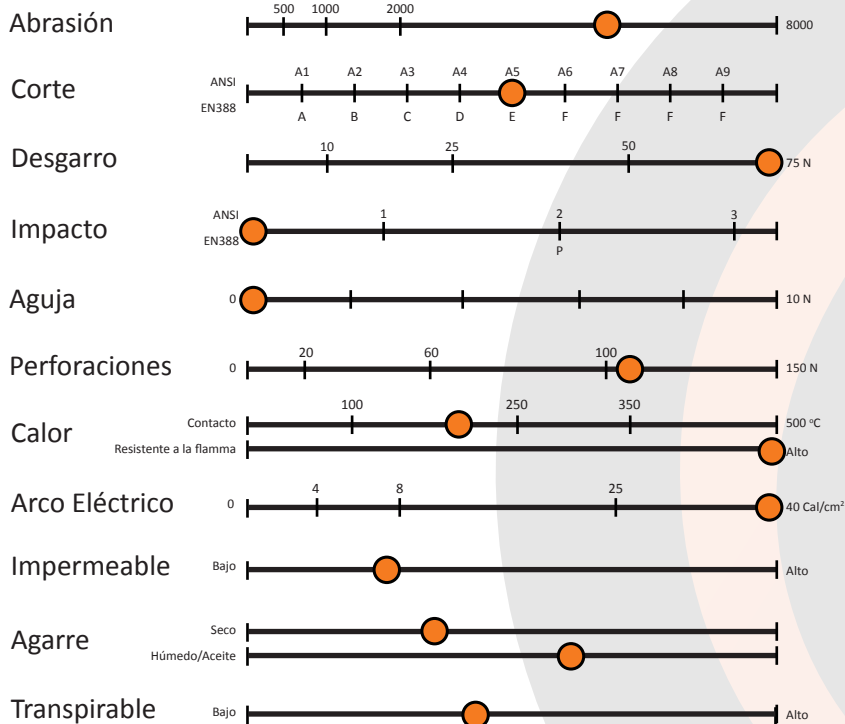

**EN388**



**4X42E**

**EN407**



**4131XX**

**ARC FLASH**

**ASTM F2675, ATPV=**

59 Cal/cm<sup>2</sup> (parte de atrás de la mano)

42 Cal/cm<sup>2</sup> (palma)

**EN 61482 Modified by Aitex (Box Test)=**

Class 2

**NFPA 70E=**

Level 4

**CE** 1493  
**CAT III**

ISO (A-F)  
A | > 2 N  
B | ≥ 5 N  
C | ≥ 10 N  
D | ≥ 15 N  
E | > 22 N  
F | > 30 N



ART.NO: 13-4HAF-50  
12 pares (1 docena)/Cartón

8	9	10	11	12
S	M	L	XL	XXL