


DRY COLD - VERY WARM - COMFORTABLE



TECHNICAL PROPERTIES

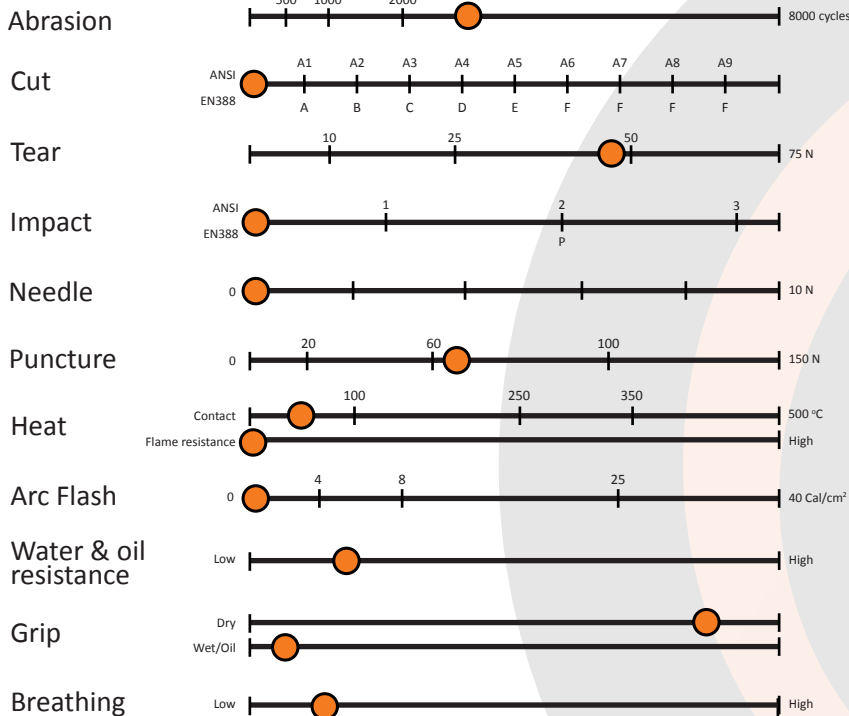

EN388



3222

EN511



24X

A: ABRASION (1-4)
B: CUT (1-5)
C: TEAR (1-4)
D: PUNCTURE (1-4)
F: ISO CUT (A-F)
P: IMPACT PROTECTION

ISO Cut force (A-F)
A | > 2 N
B | ≥ 5 N
C | ≥ 10 N
D | ≥ 15 N
E | ≥ 22 N
F | > 30 N

A: CONVECTIVE COLD (1-4)
B: CONTACT COLD (1-4)
C: WATER PENETRATION (0-1)

ART.NO: MFNWIN
60 pairs (5 dozen)/Carton

CE
CAT II

7	8	9	10	11
XS	S	M	L	XL