

EVO3[®]

MID PEAK - WHEEL RATCHET - NON-VENTILATED

PRODUCT CODE: AJE170-00 - 00

EVO3[®] IS A TRUE EVOLUTION OF THE LONG ESTABLISHED MK2 & MK3 HELMETS

TECHNICAL SPECIFICATION

HEAD PROTECTION

INSTRUCTIONS FOR USE

Fit helmet on head and fasten strap to ensure fit

For adequate protection this helmet must be worn with peak facing forward


Ensure the helmet is adjusted to the size of the user's head

WEBBING HARNESS:

HDPE Strap & Webbing Clips with Polyester Webbing Straps

CHAMLON™ SWEATBAND:

Egyptian cotton core with porous PU coating for maximum sweat absorption. PH neutral, dermatologically tested

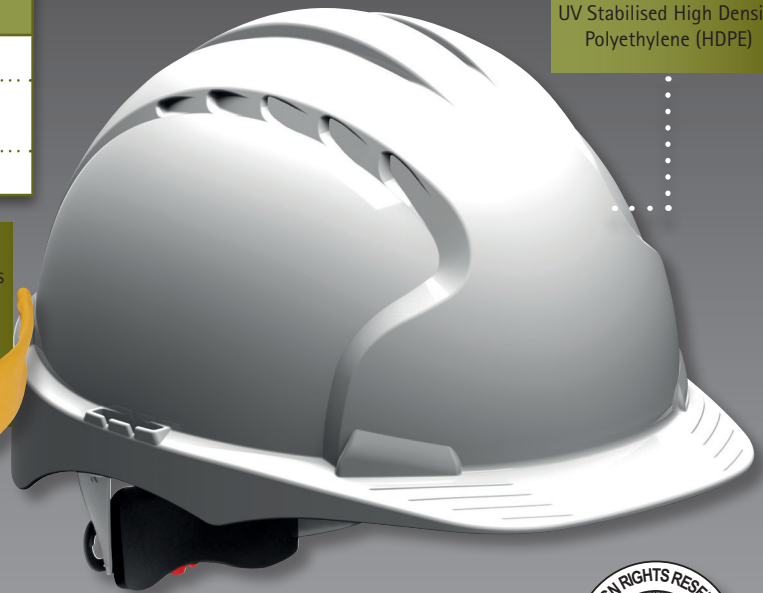

SHELL:

UV Stabilised High Density Polyethylene (HDPE)



WHEEL RATCHET:

The Revolution® Wheel Ratchet is the new easy to use wheel ratchet adjustment system to create a firm comfort fit with added security



CLEANING & MAINTENANCE

The unit may be cleaned with soap and warm water and dried with a soft cloth

The helmet should not be cleaned with chemical or abrasive cleaners

The helmet should be stored out of direct sunlight

The helmet should be stored away from chemicals and extremes of temperature

CONFORMITY

Conforms to EN397, EN50365, ANSIZ89 & GOCT P 50460-92

EU Type Examination Certificate number 676976

EN 50365 for Helmets for use in low voltage installations

Meets the retro reflective performance requirements of EN12899 when fitted with CR2 Reflective kit

Meets optional Molten Metal Splash performance

Meets optional Electrical Insulation requirements

Wide size range. Slip or wheel ratchet - High comfort fit

Available vented or unvented. Available with mid or micro peak

Company personalisation available by printing

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email technical@jpsafety.com.



MANUFACTURING FOR SAFETY
WWW.JSPSAFETY.COM

UKSALES@JSPSAFETY.COM
TEL: +44 (0)1993 826050



Issued 15/01/19, V8

EVO3[®]

MID PEAK - WHEEL RATCHET - NON-VENTILATED

PRODUCT CODE: AJE170-00 - 00

EVO3[®] IS A TRUE EVOLUTION OF THE LONG ESTABLISHED MK2 & MK3 HELMETS

TECHNICAL SPECIFICATION

HEAD PROTECTION



DIMENSIONS OF OUTER PACKAGING

Quantity: 10

Weight: 3.8kg (Approx.)



HEIGHT:
450mm

WIDTH:
240mm

LENGTH:
580mm

DIMENSIONS OF HELMET

Size: 530 - 640mm

Weight: 375g (Approx.)



HELMET COLOURS

Insert the following two digit number in place of the dashes in the product code of your desired helmet



01 White 02 Yellow 05 Blue 06 Red

HELMET FEATURES

EN STANDARD	EN397 EN50365	Yes Yes
PERFORMANCE	Impact Resistance Electrical Insulation	Yes 50 Joules Yes: EN396 440V EN50365 1000V
TEMPERATURE RESISTANCE	Molten Metal (MM) Low Temperature	Yes Yes: EN397 -40°C ГОСТ P 50460-92 -50°C
SHELL MATERIAL	HDPE Recyclable UV Stabilised	Yes Yes Yes
HARNESS MATERIAL	HDPE LDPE Textile	Yes Yes Yes
OPTIONS	Universal Accessories Reflective CR2 option Integrated Eyewear	Yes Yes Yes
HARNESS SYSTEM OPTIONS	JSP 3D Wheel Ratchet 6 pts	Yes Yes Yes
CHINSTRAP	4 pts	Yes
LOGO OPTIONS	Front Rear Side MOQ Logo Individual Name	Yes Yes Yes 10 Yes

LIMITATIONS OF USE

Protection will only be offered if the helmet is fitted correctly

Any helmet subjected to severe impact should be replaced immediately. Do not apply paint, solvents or adhesive labels except in accordance with instructions from the manufacturer

The harness, when in contact with the skin may cause allergic reactions to susceptible individuals. If this occurs leave the hazard area, remove the helmet and seek medical advice

The attention of users is also drawn to the dangers of modifying or removing any of the original component parts, other than as recommended by the manufacturer

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email technical@jsp.com



MANUFACTURING FOR SAFETY
WWW.JSPSAFETY.COM

UKSALES@JSPSAFETY.COM
TEL: +44 (0)1993 826050



Issued 15/01/19, V8